


**FAG****32924**

Tapered roller bearing

Tapered roller bearings 329, main dimensions
acc. to DIN 720, separable

Technical information

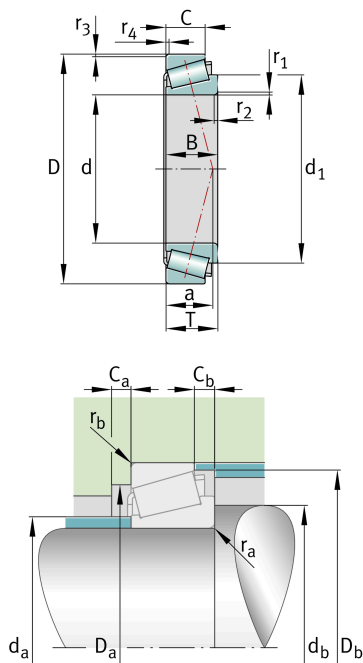

Your current product variant

Tolerance class	P6X	Class 6X (ISO 492:2023)
Heat treatment	Standard	
Cage	Standard	Sheet steel cage, window cage, roller-guided
Internal design	Standard	
Quality level	Standard	
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	120 mm	Bore diameter
D	165 mm	Outside diameter
B	29 mm	Width, inner ring
C	23 mm	Width, outer ring
T	29 mm	Width, total
C_r	176,000 N	Basic dynamic load rating, radial
C_{0r}	305,000 N	Basic static load rating, radial
C_{ur}	35,500 N	Fatigue load limit, radial
n_G	4,100 1/min	Limiting speed
n_{gr}	2,370 1/min	Thermal speed rating
$\approx m$	1.784 kg	Weight



Mounting dimensions

d _a max	128 mm	Maximum diameter of shaft shoulder
d _b min	127 mm	Minimum diameter of shaft shoulder
D _a min	154 mm	Minimum diameter of housing shoulder
D _a max	158 mm	Maximum diameter of housing shoulder
D _b min	160 mm	Minimum diameter of housing shoulder
C _a min	6 mm	Minimum axial space
C _b min	6 mm	Minimum axial space
r _a max	1.5 mm	Maximum fillet radius of shaft
r _b max	1.5 mm	Maximum fillet radius of housing

Dimensions

r _{1, 2} min	1.5 mm	Minimum chamfer dimension of inner ring back face
r _{3, 4} min	1.5 mm	Minimum chamfer dimension of outer ring back face
a	29 mm	Distance between the apexes of the pressure cones
d ₁	142.1 mm	Guidance rib diameter of inner ring

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Calculation factors

e	0.35	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y	1.72	Dynamic axial load factor
Y ₀	0.95	Static axial load factor

Additional information

T2CC120	Comparative designation to ISO 10317 and ISO 355
---------	--



Characteristics

-  Radial load
-  Axial load in one direction
-  Grease Lubrication
-  Oil Lubrication
-  Not sealed